




Whynter 50 Pint Portable Dehumidifier with Built-in Pump in White, Energy Star

Model # : RPD-506EWP


INSTRUCTION MANUAL

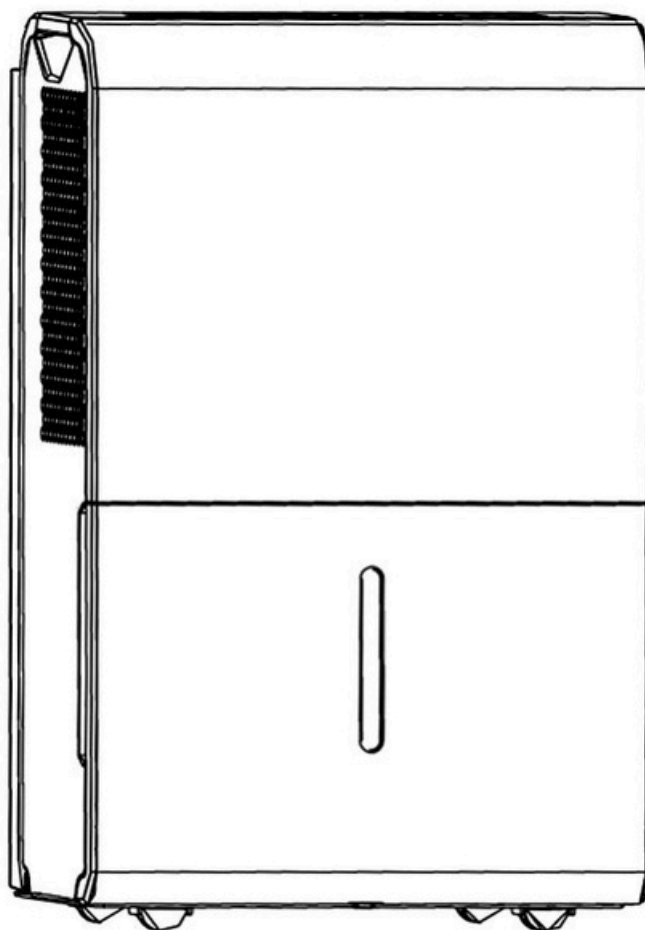

Congratulations on your new Whynter product. To ensure proper operation, please read this Instruction Manual carefully before using this product. Keep this manual in a safe place for future reference.

Thank you for choosing the Whynter Portable Dehumidifier. Please follow the instructions provided in this user guide to obtain the very best performance from your dehumidifier. We trust that your Whynter dehumidifier will provide the performance and reliability that we stand for.

Your Whynter dehumidifier is designed to remove moisture in the air by condensation removal and collecting the condensation water in the drain bucket or draining through a drain hose. Please keep this user manual in a safe place for future reference.

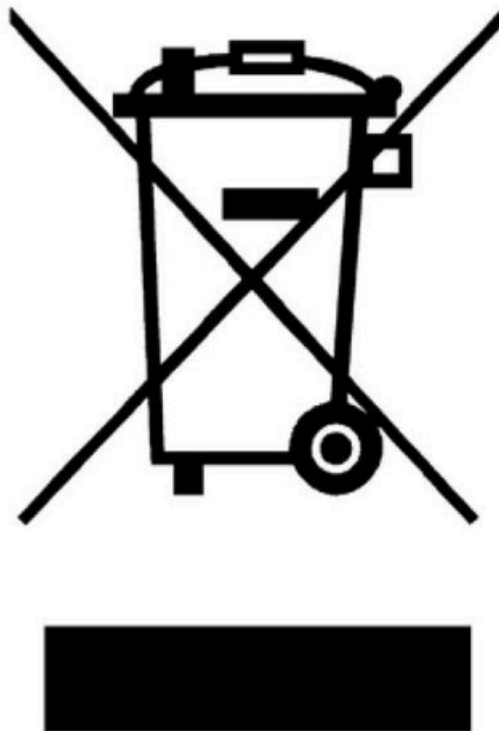

This symbol on the product or its packaging indicates that the appliance cannot be treated as normal domestic trash, but must be handed in at a collection point for recycling electric and electronic appliances. Your contribution to the correct disposal of this product protects the environment.

Further information about the recycling of this product can be obtained from your local municipal authority.

TABLE OF CONTENTS

	PAGE
DISPOSAL INFORMATION	2
SAFETY PRECAUTIONS	4
INTRODUCTION / TECHNICAL DATA	5
PARTS AND CONTROLS	6 - 9
OPERATION INSTRUCTIONS	10 - 11
WATER DRAINAGE INSTRUCTIONS	12 - 13
MAINTENANCE	14
TIPS ON WHEN TO USE YOUR PORTABLE DEHUMIDIFIER	15
TROUBLESHOOTING	16 - 17
WARRANTY INFORMATION	18

SAFETY PRECAUTIONS

WARNING

TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR INJURY WHEN USING YOUR PORTABLE DEHUMIDIFIER, FOLLOW THESE BASIC PRECAUTIONS:

- ☐ Read all instructions before using the appliance.
- ☐ Never clean appliance parts with flammable fluids. The fumes can create a fire hazard. Do not use an excessively wet cloth, industrial solvents, and oil-based products to clean this appliance.
- ☐ Do not store or use gasoline or any other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard.
- ☐ Do not abuse, sit on, or stand on the appliance.
- ☐ This appliance is not intended for use by persons (including children with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- ☐ Children should be supervised to ensure that they do not play with the appliance.
- ☐ If the power cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
- ☐ Please dispose of packing materials properly.
- ☐ Use the portable dehumidifier only for its intended function. This appliance is designed for household, non-commercial use only. Any other use will void the warranty.
- ☐ To avoid the risk of shock, the product should never be used in bathrooms, shower rooms, or in any other steamy or wet areas.
- ☐ During installation, the power supply must not be excessively or dangerously bent or flattened.
- ☐ Do not tamper with controls.
- ☐ Make sure the power plug is placed fully and firm into the wall socket. If the wall receptacle you intend to use is not adequately grounded or protected by a time delay fuse or circuit breaker, have a qualified electrician install an outlet that is appropriate to local electrical codes and requirements.
- ☐ Do not use multiple socket or of an extension cord as it may overheat and become a risk of fire.
- ☐ Make sure the power plug is clean before usage.
- ☐ Do not turn this appliance on and off by plugging and unplugging. Always use the ON/OFF switch.
- ☐ After turning the appliance off, please take the power plug out of the socket.
- ☐ Make sure hands are dry when connecting the power plug. The appliance is equipped with a three-prong grounded plug on the power cord for your protection. Never modify, remove or attempt to repair the power plug yourself.
- ☐ Do not repair, disassemble and/or modify the appliance by yourself.
- ☐ Always turn off the appliance when cleaning the air filter, and transporting.
- ☐ At the end of each season, all water must be drained from the appliance and air filter must be cleaned before storage.
- ☐ Do not drink or use the water collected or drained from the appliance.
- ☐ Do not remove the drain bucket during operation.
- ☐ Transport the appliance in an upright position only, or leave it in an upright position for at least 2 hours before first use.
- ☐ When positioning or moving the appliance, ensure that it is not turned upside down or greater than 45° or more off level.
- ☐ This appliance must be installed in an area protected from the element, such as wind, rain, water spray or drips.
- ☐ Always place the appliance on even and hard and level surface that can support the unit when it is full.
- ☐ ter.
- ☐ Ensure objects are not obstructing the exhaust and air intake.
- ☐ Never insert your fingers or other objects into the air intakes and air outlets.
- ☐ Do not operate the appliance without the air filter.

THE MANUFACTURER DISCLAIMS ANY RESPONSIBILITY IF THE ABOVE INSTRUCTIONS ARE NOT FOLLOWED

INTRODUCTION

How it Works

When the dehumidifier is started, the fan begins to pull moisture-laden air across the dehumidifying coils. The coils condense or draw moisture from the air, and air flows through the top louver into the room as dry, warm air. Moisture removed from air is collected in a drain bucket on the front of the dehumidifier.

The appliance is designed to operate between 41 °F (5°C), and 90°F (32°C). The "Compressor" circuit has an automatic 3 minute time delayed start if the appliance is turned off and on quickly. This prevents over heating of the compressor and possible circuit breaker tripping. Make sure the drain bucket is fitted correctly otherwise appliance will not turn on.


Energy Saving Guide

This Whynter dehumidifier is an Energy Star rated appliance. Follow the guide below can help to get the best performance and efficiency from your dehumidifier.




- Do not cover the air intake and outlet.
- Do not place the appliance in front of curtains or drapes-to ensure they do not obstruct the air intake.
- Keep curtains, blinds or drapes closed during the sunniest part of the day.
- Close all windows and doors.
- Indoor relative humidity should ideally be kept between 30%RH and 80%RH depending on the ambient temperature.
- Make sure the appliance is on a hard and level surface.
- To prolong the compressor's life, please wait at least 3 minutes before turning the appliance back on after shutting it off.
- Inspect and keep the air filter clean by cleaning regularly.
- Perform routine maintenance.

TECHNICAL DATA	
MODEL:	RPD-506EWP
Dehumidifying capacity	50 pints
Drain Bucket capacity	6L (13 Pints)
IEF (Liters per kW-Hour)	1.9 L/kWh
Power supply	115 V,1Ph,60 Hz
Maximum power input	810 Watts
Current Consumption	7.8 Amps
Refrigerant	R410A/6.88oz
Air flow M3/H / CFM	370/320 m3/h,217/197 CFM
Fan speeds	Hi/Low
Unit Dimensions	15.4" W x 11.1" D x 24.3" H
Unit Net Weight	42.8 lbs
Unit Gross Weight	46.9 lbs
Noise Level (dBA)	< 51/49 dBA

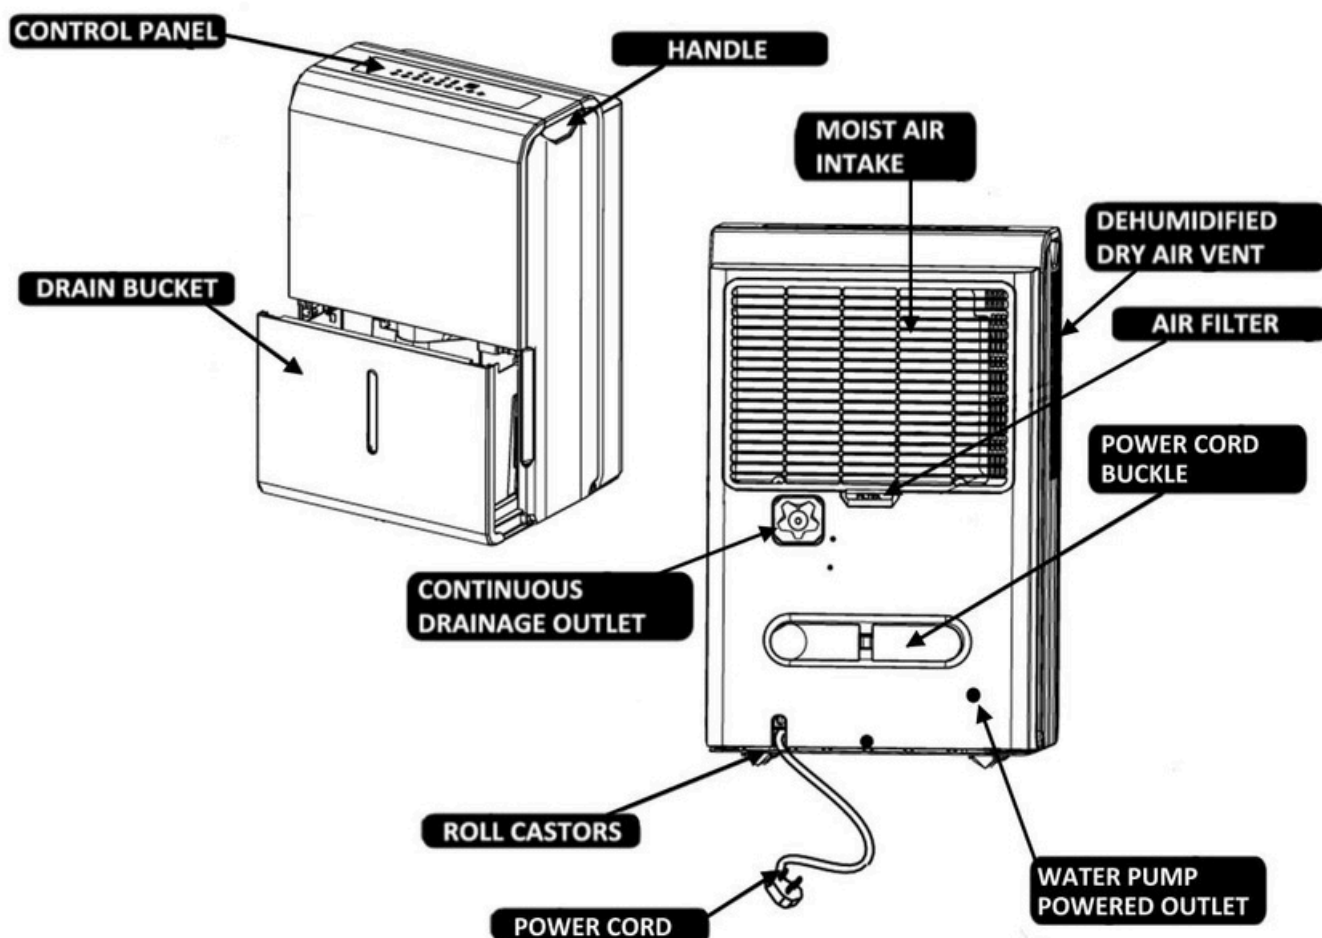PARTS AND CONTROLS




OTHER ACCESSORIES:


1. 20" Continuous/ Gravity Drain hose	
2. 16.5 ft. pump drain hose	
3. Power Cord Buckle	

Power Cord Buckle Installation

For easy storage, install the power cord buckle to the rear of the unit. Once installed, the power cord can be wrapped using the buckle for safe storage.



PARTS AND CONTROLS

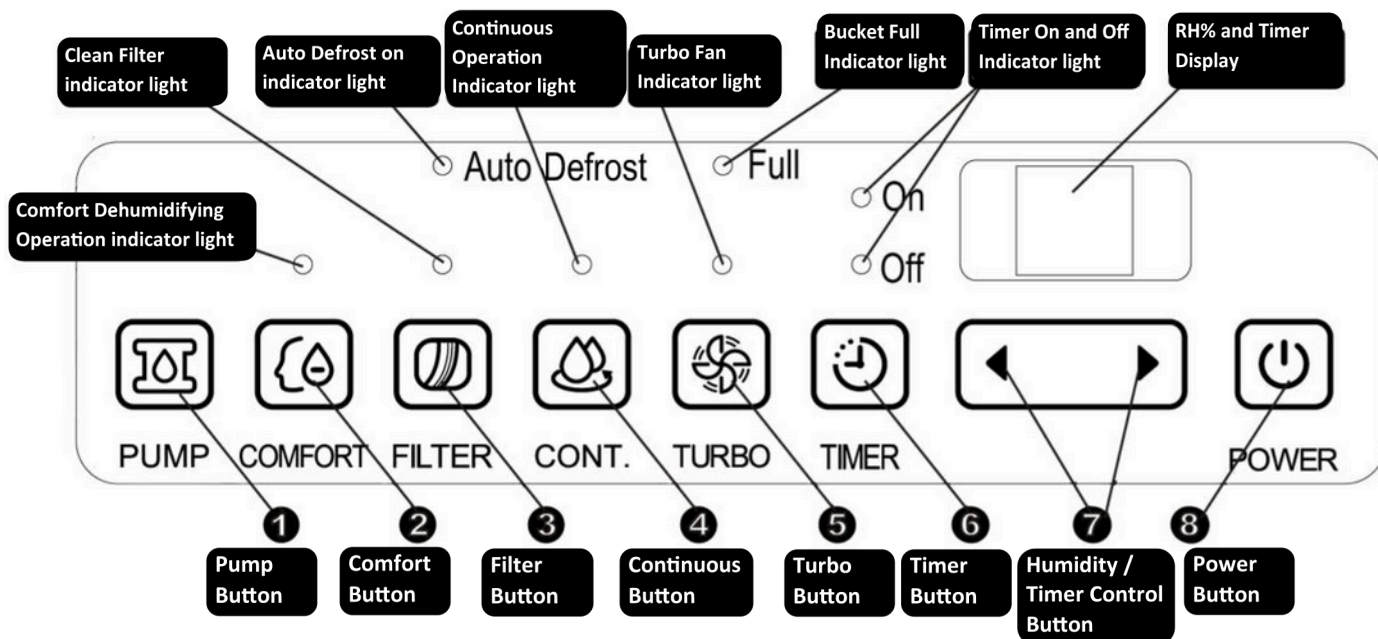

1. Pump Button

Press to activate the pump operation. The Pump indicator light will illuminate when water pump is in operation.

Note: Make sure the pump drain hose is installed into the unit and the continuous/gravity drain assembly is removed from the unit before the pump operation is activated. The water pump function will start when the drain bucket is full.

2. Comfort Button

Press to activate the Comfort Dehumidifying mode operation. The Comfort Dehumidifying indicator light will come on when this mode is selected. In this mode, the unit will automatically control the room humidity in a comfortable range of 45%~55% according to the room temperature. The humidity setting function is automatically disabled. To stop Comfort Dehumidifying operation, press the Comfort button and set the desired RH percentage value to resume normal operation.

3. Filter Button

The check filter indicator is a reminder to clean the air filter for more efficient operation. The filter light will illuminate after approximately 250 hours of operation. To reset after cleaning the filter, press the Filter button and the light will turn off.

4. Continuous Button

Press to activate the Continuous dehumidifying operation. The Continuous indicator light will come on when this mode is selected. To stop continuous operation, press the Continuous (CONT.) Button and set the desired RH percentage value to resume normal operation.

Note: The Humidity Set Control Buttons will be disabled. The compressor will not stop unless the drain bucket is full, or is removed.

5. Turbo Button

Press the Turbo button to engage Turbo Fan mode. The Turbo indicator light will come on when this speed is selected. Press the Turbo button again to set the unit to Normal Fan mode. The Turbo indicator light will turn off when Normal Fan mode is activated.

5. Timer Button

Press to activate the Timer delay feature, in conjunction with the Timer Control Buttons.

Timer Delay Switch Off

When the appliance is ON, press the Timer button to activate Auto-stop function and the Timer OFF light will come on. Set the desired time delay OFF hours by pressing the ◀ and ▶ buttons. The time increments are 1 hour up to 24 hours. When the delay time set has elapsed, the appliance switches off. To cancel the delayed switch off function, set the time to "00" or turn off the appliance.

Timer Delay Switch On

When the appliance is OFF, press the Timer button to activate Auto-start function and Timer ON light will come on. Set the desired time delay ON hours by pressing the ◀ and ▶ buttons. The time increments are 1 hour up to 24 hours. When the delay time set has elapsed, the appliance turns on. To cancel the delayed switch on function, set the time to "00" or turn off the appliance.

Timer Delay Switch On and Off Sequence

When the appliance is OFF, press the Timer button to activate Auto-start function and Timer light ON will come on. Set the desired time delay ON hours by pressing the ◀ and ▶ buttons. Once Timer Delay Switch On is placed, press the Timer button again to activate Auto-stop function and the Timer OFF light will come on. Set the desired time delay OFF hours by pressing the ◀ and ▶ buttons. When the delay time set has elapsed, the appliance switches off. To cancel the delayed switch off function, set the time to "00" or turn off the appliance.

6. Humidity /Timer Control Buttons

Humidity Set Control Buttons

The humidity level can be set within a range of 35%RH(Relative Humidity) to 85%RH in 5% increments. For lower humidity level, press the ◀ button and set to a lower RH percentage value. For higher humidity level, press the ▶ button and set to a higher RH percentage value. Once the RH% is set, the set RH% will stay on the display for about 5 seconds then it will revert back to current RH%.

Timer Set Control Buttons

If Timer Button is pressed, use the ◀ and ▶ buttons to set the Auto Start and Auto Stop time from 0.0 hour to 24 hours.

7. Power Button

Press to turn the dehumidifier on and off

Energy Saver

When the unit is running on normal operation, once the RH% is reached, the fan will still run continuously to avoid high start-up amperage which makes the unit energy-efficient. Please note that the fan may run continuously or shut off intermittently depending on the RH% and set humidity.

PARTS AND CONTROLS

Bucket Full Indicator

The appliance will run continuously until the set RH% is reached or when the drain bucket is full. When the drain bucket is full, the Full indicator light will illuminate and the dehumidifier will stop operating. Remove the water in the bucket with two hands, then place the drain bucket back to its proper position and the machine will start operating again.

Auto Defrost Indicator In the event frost builds up on the evaporator coils, the compressor will cycle off and the fan will continue to run until the frost is evaporated. This happens when the appliance is operating in low temperatures (less than 53°F or 12°C), which affects the efficiency of the dehumidifier. When this happens, the Auto Defrost light will turn on and the machine will go into periodic defrost mode automatically. Defrost time may vary. If the dehumidifier freezes up, turn the appliance off for few hours and then restart. The appliance will not operate satisfactorily if the room temperature is below 41°F

Display

The display screen shows a number of different indications depending on the selection function.

- ☐ Shows the set % relative humidity level from 35%RH to 85%RH.
- ☐ Once the RH% is set, the set RH% will stay on the display for about 5 seconds then it will revert back to current RH%.
- ☐ Shows Auto Start and Auto Stop time from 0.0 hour to 24 hours.
- ☐ After the option settings are completed, the display shows the approximate room humidity level in a range of 30%RH (Relative Humidity) to 90%RH .

Error Codes and Protection Code	
AS - Humidity Sensor Error	Unplug the unit and plug it back in.
ES - Temperature Sensor Error	Unplug the unit and plug it back in. Empty the drain bucket.
P2 - Drain Bucket Full	Please make sure float moves freely and is not stuck .
EC - Unit Malfunction	Please make sure whether the environment temperature is between 41°F (5°C), and 96°F (35°C). Unplug the unit and plug it back in.
E3 - Unit Malfunction	
Eb - Drain Bucket Error	Drain bucket is removed or not positioned correctly. Make sure that the drain bucket is properly installed and the in right position.

Auto Restart

In the event of a power outage, appliance restarts at the previously set function mode and settings when power is restored (not applicable to Timer Function).

OPERATION INSTRUCTIONS

AIR FILTERS INSTALLATION

Your Whynter portable dehumidifier is equipped with washable pre-filter. This pre-filter removes large particles such as dust, pet hair and dander.

WARNING: NEVER OPERATE THE DEHUMIDIFIER WITHOUT THE FILTER

START OPERATION

- 1.Ensure that the appliance is connected to the power socket.
- 2.Make sure the drain bucket is placed in proper position.
- 3.Make sure filter is installed. (Fig. 1)
- 4.When the unit is turned on for the first time, if the bucket full lamp lights up, just pull out the drain bucket then push it back to the proper position. (Fig. 2)
- 5.Set the relative humidity level RH% by pressing the ◀ and ▶ buttons. We recommend setting the RH% to at least 10% lower than the current RH%.

Fig. 1



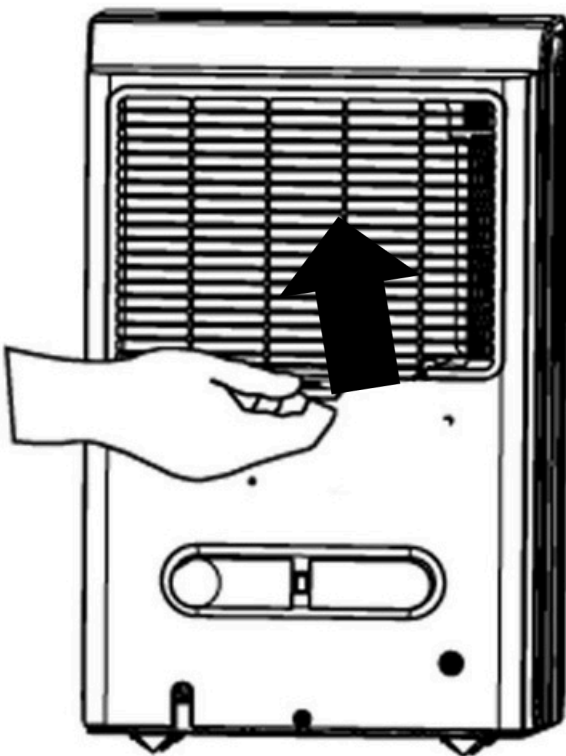


Fig. 2

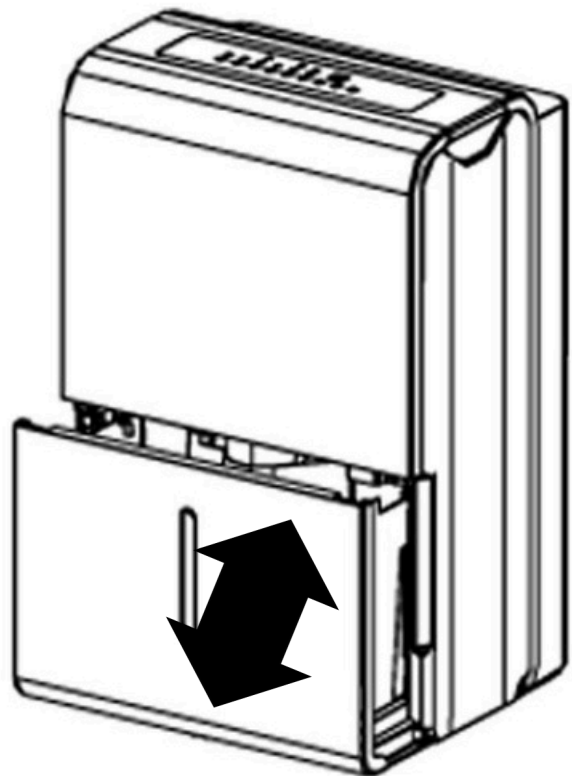

OPERATION INSTRUCTIONS

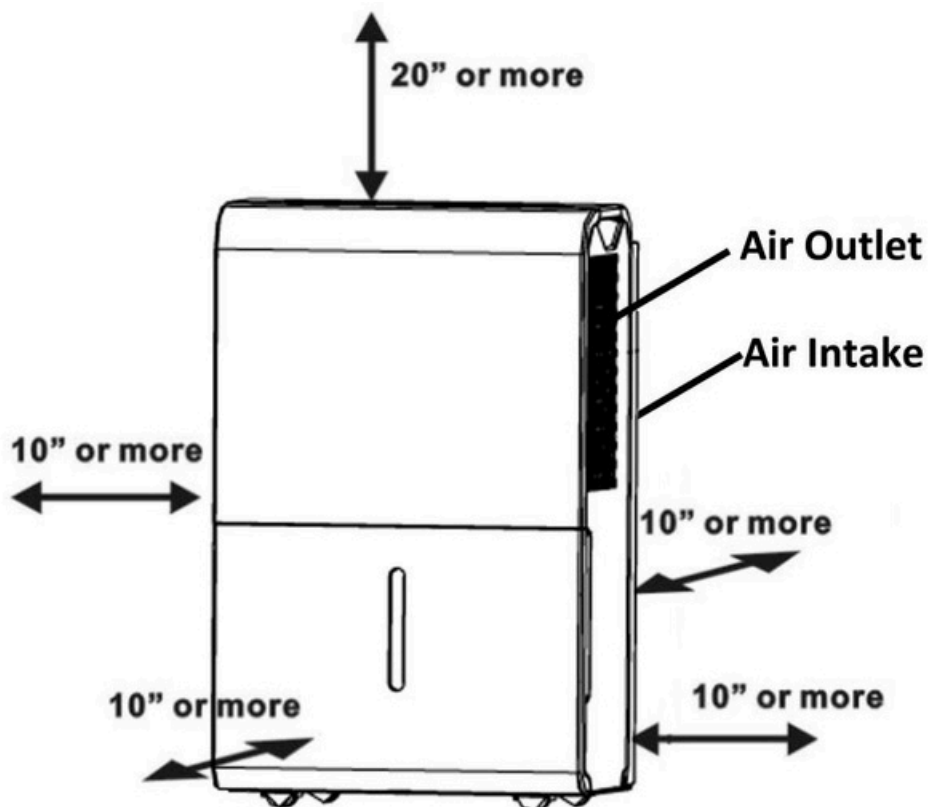

POSITIONING THE UNIT

- ☐ This dehumidifier is intended for indoor residential applications only and should not be used for commercial or industrial applications.
- ☐ Place the dehumidifier on a smooth, hard and level floor strong enough to support the appliance with a full bucket of water.
- ☐ Do not attempt to roll the appliance over objects.
- ☐ Avoid placing the appliance in an area where the temperature will fall below 53°F. The coils may become covered with frost and may reduce performance.
- ☐ Do not place the appliance near clothes dryer, heater or radiator.
- ☐ Shut all doors, windows and openings to your target dehumidifying space for maximum performance.
- ☐ Allow at least 10" of air space on all sides of the appliance for good air circulation and 20" or more above the appliance.

NOTE:

- ☐ Dehumidifiers working in a basement will have little or no effect on adjacent enclosed rooms such as closets, unless there is enough circulation of air in and out of the enclosed area.
- ☐ If the appliance has been switched off and needs to be switched on again, allow approximately three minutes for the correct operation to resume.
- ☐ Select a suitable location and make sure you have easy access to the electrical outlet.
- ☐ Ensure the air filter and drain bucket are correctly installed before switching the appliance on.
- ☐ Always be careful when moving the appliance with a full drain bucket.
- ☐ Ensure that the safety requirements and warnings detailed in this user manual are followed when operating this appliance.

WATER DRAINAGE INSTRUCTIONS

Using a portable dehumidifier requires that collected water be emptied frequently. Draining water from this unit can be done in 3 different methods:

1.DRAIN BUCKET METHOD

1.When the bucket is full, the Full indicator light will light. The compressor and fan will turn off, the Full indicator will light, and a P2 code will be displayed.

2.It is recommended to turn the unit off before removing the drain bucket.

3.Grip the left and right handles of the drain bucket securely and carefully pull out the drain bucket. Do not put the drain bucket on the floor because the bottom of the bucket is not even which may cause the water to spill. See Fig.3 and Fig. 4.

~~4.Remove the water from the drain bucket and replace it back to the dehumidifier. The drain bucket must be installed properly and securely seated for the dehumidifier to operate.~~

~~5.The machine will restart when the drain bucket is restored in its correct position. If the unit was turned off prior to the removal of the drain bucket, press the Power button to restore operation.~~




Fig. 3

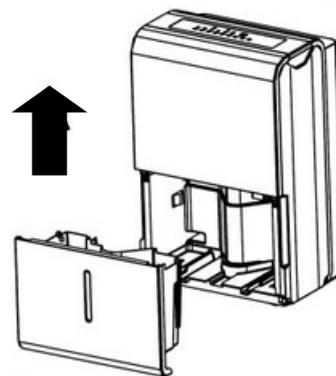


Fig. 4

NOTES:

When you remove the drain bucket, do not touch any inside parts of the unit. Doing so may damage the product and result to injury.

Be sure to push the drain bucket gently all the way into the unit. Banging the bucket against anything or failing to push it in securely may cause the unit not to operate.

If the pump filter drops when you remove the bucket (see Fig.5), you must reinstall the pump filter properly to the unit before replacing the drain bucket into the unit (see Fig.6).

Upon replacing the bucket, firmly push the bucket in place until it locks. There should be no gaps between the bucket and the dehumidifier.

When the drain bucket is removed, the unit will beep 8 times and the digital display shows **Eb**. **Eb** is an error code that indicates that the drain bucket is removed or not positioned correctly. Make sure that the drain bucket is properly installed and in the right position.




Fig. 5

Pump filter




Fig. 6

Push up pump filter in place


WATER DRAINAGE INSTRUCTIONS

2. CONTINUOUS / GRAVITY DRAIN METHOD

Water can be automatically emptied into a floor drain by attaching the 20" continuous/gravity drain hose to the continuous/gravity drain outlet. To use gravity to drain your portable dehumidifier, it must be installed on a level surface or at least 12 inches above the ground, on a sturdy table or shelf unit. When using the function of continuous/gravity drainage, your drain hose must be placed horizontally below the drainage hole. Avoid uneven ground and folding the hose.

1. Remove the continuous drain cover and then attach the 20" continuous/gravity drain hose. Make sure the hose is securely fastened to prevent leakage.
2. Direct the drain hose toward a drain or other suitable drainage outlet. Make sure that there are no distortions with the hose that may stop the water flow. (See Fig. 7)
3. Select the desired humidity setting and fan speed on the unit for continuous draining to start.

Fig. 7

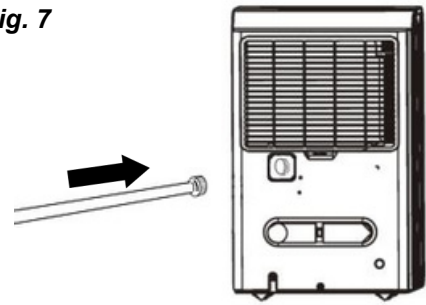

NOTE: When using continuous/gravity drainage setup, there may be some water collected in the water in the drain bucket

3. WATER PUMP METHOD

One of the key features of this dehumidifier is that it has a water pump that pushes water up or over a longer distance. Using this feature will enable your unit to run maintenance free.


NOTE: The water pump will ONLY engage when the drain bucket is full.

1. Make sure the continuous/gravity drain assembly is removed from the continuous/gravity drain outlet and the plastic cover is installed.
2. Insert the 16 ft. pump drain hose (included) into the bottom pump drain outlet (See Fig. 8), then lead the drain hose to a suitable drainage facility. Make sure that the hose is fully inserted to avoid water leakage and no kinks which will cause the water to stop flowing.
3. Press the Pump button to activate the pump operation

NOTE: The water pump will ONLY engage when the drain bucket is full.

4. The water pump may make some noise when it starts to work with in the first 3 - 5 minutes. This is a part of the unit's normal operation.
5. Select the desired humidity setting and fan speed on the unit.


Fig. 8

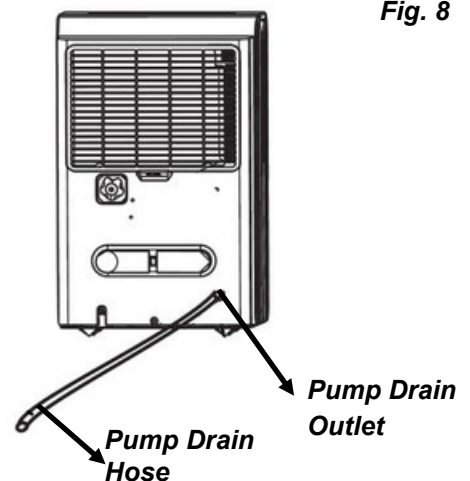

NOTE: The Pump Indicator Light will flash when there is a failure in the pump operation. Please turn off the unit and unplug the power cord and check the following points:


- Clean the pump filter - remove the drain bucket from the unit, pull down the pump filter, and clean (See Fig. 9)
- Check the pump drain hose for kinks or obstructions
- Reinstall the pump filter and drain bucket properly. Turn on the unit. If the error repeats, call for service
- Do not use this operation when the outdoor temperature is equal to or less than 32°F. Otherwise, water hose may be blocked as the water will turn to ice and cause the unit to fail. When the pump drain feature is not being used, remove the pump drain hose from the outlet.

Fig. 9

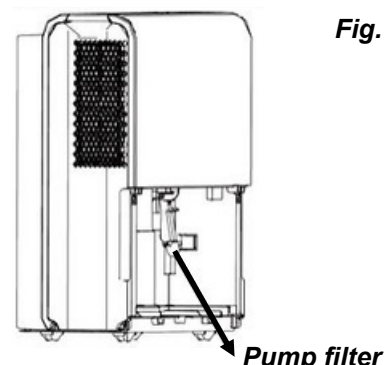

MAINTENANCE

CAUTION: Always turn off and unplug the dehumidifier before cleaning



1. Cleaning the air grille and main unit

- ☐ Use a damp cloth to wrap the main unit or use water and a mild detergent. Do not use bleach, chemicals or abrasives.
- ☐ Do not splash water directly onto the unit. Doing so may cause an electrical shock, cause the insulation to deteriorate, or cause the unit to rust.
- ☐ Use a vacuum attachment or brush to clean the air intake and outlet grilles.

2. Cleaning the bucket


- ☐ Clean the bucket to prevent growth of mold, mildew and bacteria every two weeks.
- ☐ Fill the bucket with clean warm water and add mild detergent to the water.
- ☐ Dry thoroughly before reinserting the bucket to the main unit.

NOTE: Do not clean the bucket in a dishwasher.

3. Cleaning the air filter


To ensure the air intake is filtered properly and to assure that your dehumidifier runs efficiently, it is recommended to clean the air filter at least once every two weeks.

- ☐ Use a vacuum cleaner or tap the filter lightly to remove loose dust and dirt.
- ☐ Rinse the air filter under warm or cold running water (no hotter than 100F.)
- ☐ Dry thoroughly before reinserting the air filter.
- ☐ Reinstall the air filter and replace bucket securely.

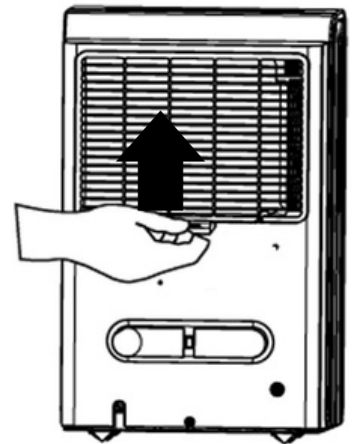

4. End of Season Storage

- ☐ After turning off the unit, wait 24 hours before emptying the bucket to allow excess moisture to drain into the bucket.
- ☐ Attach the power cord buckle.
- ☐ Wrap the power cord using the power cord buckle.
- ☐ Clean the main unit, drain bucket and air filter as detailed above.
- ☐ Cover the unit with the original plastic bag that came with the unit or any appropriate dust cover.
- ☐ Store the unit upright in a dry, well-ventilated place.

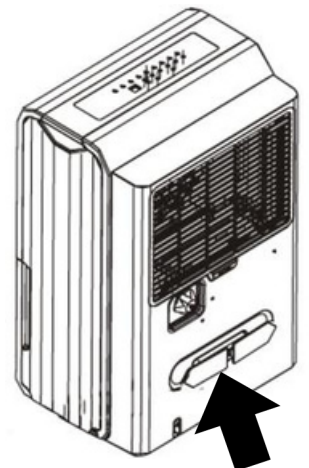

TIPS ON WHEN TO USE YOUR PORTABLE DEHUMIDIFIER

If you have respiratory problems, asthma and allergies, your Whynter Portable Dehumidifier is a great option for controlling moist environments. Creating dry air can keep indoor air pollutants at a more manageable level, especially when used in conjunction with an air purifier. Using your portable dehumidifier can help you save money in the long run because it uses relatively little power and can help furnaces and air conditioners operate more efficiently.

1. *Excess moisture*

Indoor environments with excessive moisture can cause mold and fungus to thrive inside the walls and beneath the carpet. Many types of mold are potentially dangerous and can lead to health problems. This Whynter Portable Dehumidifier reduces the amount of moisture in the air inside a home, which makes it far more difficult for harmful mold to grow. This portable dehumidifier is also effective for a small area, such as a hallway or bedroom.

2. *Respiratory problems or allergies*

This Whynter Portable Dehumidifier which is perfect for larger rooms or areas in your home, including a living room or family room. If your home is musty, you will want to use your portable dehumidifier, especially if you have respiratory trouble or allergies. This unit can also help relieve symptoms by controlling the relative humidity inside your home and a good idea in general if your home has such underlying problems as a leaky foundation walls or inadequate ventilation or if you live in a humid area. By keeping the relative humidity indoors below 50 percent, you can keep allergy-inducing dust mites and mold from thriving.

3. *Basements*

If you have a basement that is below-grade, you should use your Whynter Portable Dehumidifier. This dehumidifier will help you keep the moisture levels in your basement down to manageable levels. By doing this, you can help keep your indoor furnace operating efficiently and even help eliminate minor standing-water problems. Your portable dehumidifier also can help keep furniture and valuables dry, and it will help keep electronics in proper working order.

4. *Humid climates*

In humid climates, such as areas near a beach or large body of water, this Whynter Portable Dehumidifier can help keep the environment in your home at a more comfortable level. While the actual temperature won't be affected, you'll sleep more comfortably and may actually save money, since your unit can keep the indoor humidity and, thus, your thermostat under control.

TROUBLESHOOTING

Many common portable dehumidifiers problems are easily resolved. Try the troubleshooting suggestions below to see if the problems can be resolved before having to contact the service department.

Problem	Possible Causes	Solutions
The dehumidifier does not operate.	<input type="checkbox"/> Power failure / outage. <input type="checkbox"/> The automatic switch, line fuse, or breaker has been tripped. <input type="checkbox"/> The power supply voltage is too low. <input type="checkbox"/> The power cord is damaged. <input type="checkbox"/> The dryness level you selected has been reached. <input type="checkbox"/> Drain bucket is full or not positioned properly.	Restore the power supply. <input type="checkbox"/> Flip the switch / change the fuse / turn the breaker back on. Also note that you may have too many appliances drawing power on one circuit, you may need to move the other appliances to another circuit. <input type="checkbox"/> Move the appliance onto another circuit with the correct voltage. <input type="checkbox"/> Call for service. Only authorized personnel should replace damaged power cord or power plug. <input type="checkbox"/> If you want to remove more moisture, set the unit on Continuous operation. <input type="checkbox"/> Empty drain bucket and insert the bucket to the appliance properly.
The dehumidifier runs too much.	<input type="checkbox"/> Windows or doors near dehumidifier are open. <input type="checkbox"/> Area to be dehumidified is too large. <input type="checkbox"/> Air movement through dehumidifier is blocked. Air grille may be dirty. <input type="checkbox"/> Continuous mode is on.	Close all windows or doors. <input type="checkbox"/> You may need an additional dehumidifier for area. <input type="checkbox"/> Clean the air filter. <input type="checkbox"/> The appliance must be placed in a space that does not restrict air flowing into the rear coil or out of the front grille. <input type="checkbox"/> Set the RH% level and the appliance will stop when the set RH% is reached. Set the humidity level to a lower RH%.
The dehumidifier runs but the room is not dry enough.	<input type="checkbox"/> Humidity setting (RH%) is too high. The dehumidifier does not have <input type="checkbox"/> sufficient clearance to operate. <input type="checkbox"/> Room temperature is too low. <input type="checkbox"/> Windows or doors are opened . <input type="checkbox"/>	<input type="checkbox"/> We recommend setting the RH% to at least 10% lower than the current RH%. Ensure there is at least 10" of clearance for proper ventilation. <input type="checkbox"/> The appliance will not operate satisfactorily if the room temperature is below 41°F <input type="checkbox"/> Close windows or doors. <input type="checkbox"/>
Frost appears on the coils above the bucket.	<input type="checkbox"/> The dehumidifier has been turned on recently. <input type="checkbox"/> Room temperature is too low.	<input type="checkbox"/> This is normal due to refrigerant rushing through the coil. Frost will usually disappear within 60 minutes. This happens when the appliance is operating in low temperatures less than 53°F . <input type="checkbox"/> The appliance will not operate satisfactorily if the room temperature is below 41°F.
The dehumidifier makes loud noise.	<input type="checkbox"/> Appliance is not leveled.	<input type="checkbox"/> Shut off the appliance and let it sit on level surface for at least 6 hours.

TROUBLESHOOTING

Many common portable dehumidifiers problems are easily resolved. Try the troubleshooting suggestions below to see if the problems can be resolved before having to contact the service department.

Problem	Possible Causes	Solutions
	Continuous/gravity drain hose	
The dehumidifier leaks.	<input type="checkbox"/> is loose. Cracked drain bucket. <input type="checkbox"/> Power failure or outage.	<input type="checkbox"/> Secure the drain hose. <input type="checkbox"/> Contact Whynter Service Department.
The dehumidifier does not operate.	<input type="checkbox"/> The automatic switch, line fuse, or breaker has been tripped. <input type="checkbox"/> The power supply voltage is too low. <input type="checkbox"/> The power cord is damaged. <input type="checkbox"/> The dryness level you selected has been reached. <input type="checkbox"/> Drain bucket is full or not positioned properly.	<input type="checkbox"/> Restore the power supply. <input type="checkbox"/> Flip the switch / change the fuse / turn the breaker back on. Also note that you may have too many appliances drawing power on one circuit, you may need to move the other appliances to another circuit. <input type="checkbox"/> Move the appliance onto another circuit with the correct voltage. <input type="checkbox"/> Call for service. Only authorized personnel should replace damaged power cord or power plug. <input type="checkbox"/> If you want to remove more moisture, set the unit on Continuous operation. <input type="checkbox"/> Empty drain bucket and insert the bucket to the appliance properly.
The pump indicator light blinks.	<input type="checkbox"/> Water pump filter is dirty <input type="checkbox"/> Water pump drain hose is obstructed or kinked.	<input type="checkbox"/> Clean the filter of the pump. <input type="checkbox"/> Make sure that the water pump drain hose is not obstructed .
Water on floor.	<input type="checkbox"/> Drain bucket is not installed properly. <input type="checkbox"/> Drain hose connection may be loose or not installed properly.	<input type="checkbox"/> Install the drain bucket securely. <input type="checkbox"/> Make sure that the drain hose is securely installed in the drain outlet. <input type="checkbox"/> For Drain Bucket method, make sure that the continuous drain assembly is not installed and rubber drain cover is in place. <input type="checkbox"/> For Continuous/Gravity Drain method and Water Pump method, make sure the hose is securely fastened to prevent leakage. Direct the drain hose toward a drain or other suitable drainage outlet.

ONE YEAR LIMITED WARRANTY

This WHYNTER product is warranted to the original owner, purchased from an authorized Whynter dealer within the 48 U.S. continental states, for one year from the original purchase date against defects in material and workmanship under normal residential usage. Should your WHYNTER product prove defective within one year from the date of purchase, contact Whynter's Customer Support Team with the serial number and proof of purchase to make a warranty claim. A Return Authorization Number must be issued before returning any parts or products. Parts or products received without a Whynter issued Return Authorization Number will be refused. Under this warranty, Whynter will repair or replace any parts found defective with new or remanufactured parts or exchange the defective product with a new, refurbished, or remanufactured product at our discretion. All defective products and parts covered by this warranty will be repaired or replaced on a mail-in basis to Whynter's Service Center. This warranty is not transferable. After the expiration of the warranty, the cost of labor and parts will be the responsibility of the original owner.

Return freight is prepaid by Whynter within two months of purchase. After two months to one year, the customer will be responsible for the return freight cost to Whynter's Service Center. Please package the product carefully in its original packaging to avoid damage in transit. Whynter is not responsible for damage resulting from shipper mishandling or improper packaging. Please retain the original box and packaging materials.

THIS WARRANTY DOES NOT COVER:

- Acts of God, such as fire, flood, hurricanes, earthquakes and tornadoes.
 - Improper power supply such as power surge, low voltage, defective household wiring or inadequate fuses.
 - Use in commercial or industrial applications.
 - Damage, accidental or otherwise, to the WHYNTER Beverage Refrigerator while in the possession of a consumer not caused by a defect in material or workmanship
 - Damage caused by consumer misuse, tampering, or failure to follow the care and special handling provisions in the instructions.
 - Damage to the finish of the case, or other appearance parts caused by wear.
- Damage caused by repairs or alterations to the product by anyone other than authorized by the manufacturer.

Removal, Replacement Packaging, Freight and Insurance cost for the warranty service

DISCLAIMER OF IMPLIED WARRANTIES; LIMITATION OF REMEDIES

CUSTOMER'S SOLE AND EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY SHALL BE PRODUCT REPAIR OR REPLACEMENT AS PROVIDED HEREIN. CLAIMS BASED ON IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED TO ONE YEAR OR THE SHORTEST PERIOD ALLOWED BY LAW, BUT NOT LESS THAN ONE YEAR. WHYNTER SHALL NOT BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES SUCH AS PROPERTY DAMAGE AND INCIDENTAL EXPENSES RESULTING FROM ANY BREACH OF THIS WRITTEN LIMITED WARRANTY OR ANY IMPLIED WARRANTY. SOME STATES AND PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR LIMITATIONS ON THE DURATION OF IMPLIED WARRANTIES, SO THESE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WRITTEN WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM STATE TO STATE.

The warranty, product contents and specifications are subject to change at any time without notice; please refer to www.whynter.com for the most current information.

To register your warranty, please visit www.whynter.com and fill out the online Warranty Registration form. Please be sure to include a copy of your purchase invoice.

To obtain service or information, contact Whynter LLC via email at support@whynter.com or call 866-WHYNTER (866-949-6837).

Copyright © 2020 Whynter LLC

www.whynter.com